

Rec'd PCT/PTO 28 SEP 2003

60/553475  
REC'D 19 MAY 2004  
WIPO PCT

PA 1038369

**THE UNITED STATES OF AMERICA****TO ALL TO WHOM THESE PRESENTS SHALL COME:****UNITED STATES DEPARTMENT OF COMMERCE****United States Patent and Trademark Office****July 15, 2003**

**THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM  
THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK  
OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT  
APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A  
FILING DATE UNDER 35 USC 111.**

**APPLICATION NUMBER: 60/469,190****FILING DATE: May 09, 2003**

**PRIORITY DOCUMENT  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH  
RULE 17.1(a) OR (b)**

**By Authority of the  
COMMISSIONER OF PATENTS AND TRADEMARKS**



*T. Wallace*  
**T. WALLACE**  
**Certifying Officer**

**EXPRESS MAILING CERTIFICATE**

This certifies that the attached **Form PTO/SB/16** (in duplicate), **Specification (25 pages)** for the provisional application of **Luigi Resconi et al.** for **PROCESS FOR PREPARING POROUS POLYMERS AND POLYMERS THEREOF** (our ref: **FE 6101 (US)**) is being mailed by "Express Mail Post Office to Addressee" service in an envelope addressed:

Mail Stop Provisional Application  
Commissioner for Patents  
P. O. Box 1450  
Alexandria, VA 22313-1450

and deposited on **May 9, 2003** as "Express Mail" in the United States Postal Service, the number of the "Express Mail" mailing label being **EK794123583US**.

Kyle Boulden

Typed Name of Person Mailing Paper or Fee

Ky B

Signature of Person

patdocs/expmail

05/09/03  
1997 U.S. PTO

05-12-03


PTO/SB/18 (10-01)  
U.S. Patent and Trademark Office, U.S. DEPARTMENT OF COMMERCE  
Approved for use through 10/31/2002  
AIP

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

# PROVISIONAL APPLICATION FOR PATENT COVER SHEET

This is a request for filing a PROVISIONAL APPLICATION FOR PATENT under 37 CFR 1.53(c).

Express Mail Label No. **EK794123583US**

INVENTOR(S)					
Given Name (first and middle (if any))	Family Name or Surname	Residence (City and either State or Foreign Country)			
Luigi	Resconi	Ferrara, Italy			
Eleonora	Ciaccia	Ferrara, Italy			
Anna	Fait	Ferrara, Italy			
<input type="checkbox"/> Additional inventors are being named on the _____ separately numbered sheets attached hereto					
TITLE OF THE INVENTION (500 characters max)					
PROCESS FOR PREPARING POROUS POLYMERS AND POLYMERS THEREOF					
Direct all correspondence to: CORRESPONDENCE ADDRESS					
<input checked="" type="checkbox"/> Customer Number		<input type="text"/>			
OR		Type Customer Number here		34872	
<input type="checkbox"/> Firm or Individual Name		William R. Reid			
		PATENT TRADEMARK OFFICE			
Address		Basell USA Inc.			
Address		912 Appleton Road			
City		Elkton	State	MD	ZIP 21921
Country		US	Telephone	410-996-1783	Fax 410-996-1560
ENCLOSED APPLICATION PARTS (check all that apply)					
<input checked="" type="checkbox"/> Specification		Number of Pages 25		<input type="checkbox"/> CD(s), Number	
<input type="checkbox"/> Drawing(s)		Number of Sheets		<input type="checkbox"/> Other (specify)	
<input type="checkbox"/> Application Data Sheet. See 37 CFR 1.76					
METHOD OF PAYMENT OF FILING FEES FOR THIS PROVISIONAL APPLICATION FOR PATENT					
<input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27.				FILING FEE AMOUNT (\$)	
<input type="checkbox"/> A check or money order is enclosed to cover the filing fees					
<input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge filing fees or credit any overpayment to Deposit Account Number.		08-2336		\$160.00	
<input type="checkbox"/> Payment by credit card. Form PTO-2038 is attached.					
The invention was made by an agency of the United States Government or under a contract with an agency of the United States Government.					
<input checked="" type="checkbox"/> No.					
<input type="checkbox"/> Yes, the name of the U.S. Government agency and the Government contract number are: _____					

Respectfully submitted,  
SIGNATURE William R. Reid  
TYPED or PRINTED NAME William R. Reid  
TELEPHONE 410-996-1783

Date **05/09/2003**  
REGISTRATION NO. **47,894**  
(if appropriate)  
Docket Number: **FE 6101 (US)**

## USE ONLY FOR FILING A PROVISIONAL APPLICATION FOR PATENT

This collection of information is required by 37 CFR 1.51. The information is used by the public to file (and by the PTO to process) a provisional application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 8 hours to complete, including gathering, preparing, and submitting the complete provisional application to the PTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, Washington, D.C. 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Box Provisional Application, Assistant Commissioner for Patents, Washington, D.C. 20231.

FE 6101 (US)

**PROCESS FOR PREPARING POROUS POLYMERS AND POLYMERS  
THEREOF**

The present invention relates to a process for preparing porous propylene polymers. The invention further relates to the porous polymers obtainable by this process.

5 Porous polymers are known in the art, they have many uses, for example they can be used as adsorbents, masterbatches, supports for catalyst systems, filter mediums or battery separators.

Processes for obtaining porous olefin polymers by using titanium-based catalyst systems are well known in the art. For example in US 4,399,054 a polymer in spherical  
10 particle form having high flowability and bulk density is obtained. In PCT/EP02/13371 a process for increasing the porosity of a polymer is described.

More recently metallocene-based catalyst has been industrially exploited. By using metallocene-based catalyst systems it is possible to produce polymers having features different from those obtained by using titanium-based catalysts, for example  
15 polymers having narrow molecular weight distribution. In particular with metallocene-based catalysts it is possible to tune the properties of the desired polymer by changing the structure of the metallocene compound. However a process that allows to improve the porosity of polymers obtained by using metallocene-based catalyst system it is not known. Also when metallocene-based catalyst systems are supported on porous polymer such as,  
20 for example as described in WO 95/26369, the porosity of the obtained polymer is not satisfactory, as shown in the comparative examples of the present invention. Thus it would be desirable to find a process that allows to obtain propylene polymers endowed with an enhanced porosity by using metallocene-based catalyst systems. This problem has been solved by supporting a metallocene-based catalyst system on a porous polymer,  
25 carrying out the polymerization in the presence of hydrogen and by using liquid propylene as polymerization medium.

An object of the present invention is a process for obtaining porous propylene polymers optionally containing up to 10% by mol of derived units of one or more alpha-olefins of formula  $\text{CH}_2=\text{CHZ}$  wherein Z is H or a  $\text{C}_2\text{-C}_{10}$  alkyl radical, comprising the step  
30 of polymerizing propylene and optionally said one or more alpha olefins, under

FE 6101 (US)

polymerization conditions, in the presence of a catalyst system comprising at least a metallocene compound, said process being characterized in that:

- a) the catalyst system is supported on an organic porous polymer; and
- b) at least part of the polymerization reaction is carried out in the presence of hydrogen.

5       The polymerization reaction is preferably carried out at a temperature ranging from  $-20^{\circ}\text{C}$  to  $90^{\circ}\text{C}$ .

      The polymerization process of the present invention can be carried out in liquid phase, in which the polymerization medium is liquid propylene optionally in the presence of an inert hydrocarbon solvent, and of one or more comonomer of formula  $\text{CH}_2=\text{CHZ}$  or in  
10   gas phase. Said hydrocarbon solvent can be either aromatic (such as toluene) or aliphatic (such as propane, hexane, heptane, isobutane, cyclohexane and 2,2,4-trimethylpentane).

      Preferably the polymerization medium is liquid propylene. It can optionally contains minor amounts (up to 20% by weight, preferably up to 10% by weight, more preferably up to 5% by weight) of an inert hydrocarbon solvent or of one or more  
15   comonomer of formula  $\text{CH}_2=\text{CHZ}$ . Said hydrocarbon solvent can be either aromatic (such as toluene) or aliphatic (such as propane, hexane, heptane, isobutane, cyclohexane and 2,2,4-trimethylpentane).

      The amount of hydrogen present during the polymerization reaction is preferably more than 1 ppm; more preferably from 5 to 2000 ppm; even more preferably from 6 to  
20   500 ppm. Hydrogen can be added either at the beginning of the polymerization reaction or it can also be added at a later stage after a prepolymerization step has been carried out.

      The organic porous polymer has preferably porosity due to pores with diameter up to  $10\text{ }\mu\text{m}$  ( $100000\text{ }\text{\AA}$ ) measured to the method reported below, higher than 0.1 cc/g preferably comprised between 0.2 cc/g to 2 cc/g; more preferably from 0.3 cc/g to 1 cc/g.

25       In the organic porous polymer fit as support according to the process of the present invention, the total porosity due to all pores whose diameter is comprised between  $0.1\text{ }\mu\text{m}$  ( $1000\text{ }\text{\AA}$ ) and  $2\text{ }\mu\text{m}$  ( $20000\text{ }\text{\AA}$ ) is at least 30% of the total porosity due to all pores whose diameter is comprised between  $0.02\text{ }\mu\text{m}$  ( $200\text{ }\text{\AA}$ ) and  $10\text{ }\mu\text{m}$  ( $100000\text{ }\text{\AA}$ ). Preferably the total porosity due to all pores whose diameter is comprised between  $0.1\text{ }\mu\text{m}$  ( $1000\text{ }\text{\AA}$ ) and  
30    $2\text{ }\mu\text{m}$  ( $20000\text{ }\text{\AA}$ ) is at least 40% of the total porosity due to all pores whose diameter is comprised between  $0.02\text{ }\mu\text{m}$  ( $200\text{ }\text{\AA}$ ) and  $10\text{ }\mu\text{m}$  ( $100000\text{ }\text{\AA}$ ). More preferably the total

FE 6101 (US)

porosity due all pores whose diameter is comprised between 0.1  $\mu\text{m}$  (1000  $\text{\AA}$ ) and 2  $\mu\text{m}$  (20000  $\text{\AA}$ ) is at least 50% of the total porosity due all pores whose diameter is comprised between 0.02  $\mu\text{m}$  (200  $\text{\AA}$ ) and 10  $\mu\text{m}$  (100000  $\text{\AA}$ ).

5 The organic porous polymer is preferably a porous polyolefin more preferably porous polypropylene or porous polyethylene such as those obtainable according to the process described in WO 95/26369, WO 00/08065.

10 The catalyst system to be supported on an organic porous polymer, according to the present invention, does not further contain silica or other inorganic support. The amount of organic porous polymer used as support is generally so low (up to 5% by weight with respect to the total polymer, preferably up to 1% by weight) that does not substantially influence the properties of the final polymer.

15 A further object of the present invention is a process for obtaining a porous propylene polymer optionally containing up to 10% by mol of derived units of one or more alpha-olefins of formula  $\text{CH}_2=\text{CHZ}$  wherein Z is H or a  $\text{C}_2\text{-C}_{10}$  alkyl radical, comprising the following steps:

- a) prepolymerizing propylene optionally with one or more alpha-olefins of formula  $\text{CH}_2=\text{CHZ}$  wherein Z is H or a  $\text{C}_2\text{-C}_{10}$  alkyl radical in the presence of a catalyst system supported on an organic porous polymer, said catalyst comprising a metallocene compound; wherein the polymerization medium is liquid propylene; and
- 20 b) contacting propylene and optionally one or more alpha-olefins of formula  $\text{CH}_2=\text{CHZ}$  wherein Z is H or a  $\text{C}_2\text{-C}_{10}$  alkyl radical under polymerization conditions in the presence of hydrogen and the prepolymerized catalyst system obtained in step a).

Preferably in step b) the polymerization medium is liquid propylene as described above.

25 The prepolymerized catalyst system preferably contains from 5 to 200 g of polymer per gram of catalyst system.

The prepolymerization is preferably carried out at a temperature ranging from  $-20^\circ\text{C}$  to  $70^\circ\text{C}$ .

30 The catalyst system containing a metallocene compound used in the process of the present invention is obtainable by reacting:

- a) at least a metallocene compound;

FE 6101 (US)

- b) at least an alumoxane or a compound able to form an alkylmetallocene cation; and
- c) optionally an organo aluminum compound.

The supportation of said catalyst system is achieved by depositing the metallocene compound a) or the product of the reaction thereof with the component b), or the component b) and then the metallocene compound a) on the organic porous support. The supportation process is carried out in an inert solvent, such as hydrocarbon selected from toluene, hexane, pentane and propane and at a temperature ranging from 0°C to 100°C, more preferably from 10°C to 60°C. In an alternative embodiment the catalyst system is sprayed on the organic porous support.

A particularly suitable process for supporting the catalyst system is described in WO01/44319, wherein the process comprises the steps of:

- (a) preparing a catalyst solution comprising a catalyst system;
- (b) introducing into a contacting vessel:

- (i) a porous support material in particle form, and


- (ii) a volume of the catalyst solution not greater than the total pore volume of the porous support material introduced;

- (c) discharging the material resulting from step (b) from the contacting vessel and suspending it in an inert gas flow, under such conditions that the solvent evaporates; and

- (d) reintroducing at least part of the material resulting from step (c) into the contacting vessel together with another volume of the catalyst solution not greater than the total pore volume of the reintroduced material.

Metallocene compounds are transition metal compounds having at least a  $\pi$ -bond.

A preferred class of metallocene compounds has the following formula (I).

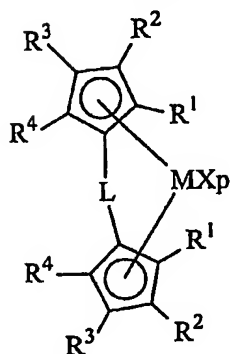

FE 6101 (US)

(I)

wherein

M is a transition metal belonging to group 4, 5 or to the lanthanide or actinide groups of the Periodic Table of the Elements; preferably M is zirconium, titanium or hafnium;

The substituents X, equal to or different from each other, are monoanionic sigma  
 5 ligands selected from the group consisting of hydrogen, halogen,  $R^6$ ,  $OR^6$ ,  $OCOR^6$ ,  $SR^6$ ,  $NR^6_2$  and  $PR^6_2$ , wherein  $R^6$  is a linear or branched, saturated or unsaturated  $C_1$ - $C_{20}$  alkyl,  $C_3$ - $C_{20}$  cycloalkyl,  $C_6$ - $C_{20}$  aryl,  $C_7$ - $C_{20}$  alkylaryl or  $C_7$ - $C_{20}$  arylalkyl group, optionally containing one or more Si or Ge atoms; the substituents X are preferably the same and are preferably hydrogen, halogen,  $R^6$  or  $OR^6$ ; wherein  $R^6$  is preferably a  $C_1$ - $C_7$  alkyl,  $C_6$ - $C_{14}$  aryl  
 10 or  $C_7$ - $C_{14}$  arylalkyl group, optionally containing one or more Si or Ge atoms; more preferably, the substituents X are Cl or Me.

p is an integer equal to the oxidation state of the metal M minus 2; preferably p is 2;

L is a divalent bridging group selected from  $C_1$ - $C_{20}$  alkylidene,  $C_3$ - $C_{20}$  cycloalkylidene,  $C_6$ - $C_{20}$  arylidene,  $C_7$ - $C_{20}$  alkylarylidene, or  $C_7$ - $C_{20}$  arylalkylidene radicals  
 15 optionally containing heteroatoms belonging to groups 13-17 of the Periodic Table of the Elements, and silylidene radical containing up to 5 silicon atoms such as  $SiMe_2$ ,  $SiPh_2$ ; preferably L is a divalent group  $(ZR^7_m)_n$ ; Z being C, Si, Ge, N or P, and the  $R^7$  groups, equal to or different from each other, being hydrogen or linear or branched, saturated or unsaturated  $C_1$ - $C_{20}$  alkyl,  $C_3$ - $C_{20}$  cycloalkyl,  $C_6$ - $C_{20}$  aryl,  $C_7$ - $C_{20}$  alkylaryl or  $C_7$ - $C_{20}$  arylalkyl  
 20 groups or two  $R^7$  can form a aliphatic or aromatic  $C_4$ - $C_7$  ring;

more preferably L is selected from  $Si(CH_3)_2$ ,  $SiPh_2$ ,  $SiPhMe$ ,  $SiMe(SiMe_3)$ ,  $CH_2$ ,  $(CH_2)_2$ ,  $(CH_2)_3$  or  $C(CH_3)_2$ ;

$R^1$ ,  $R^2$ ,  $R^3$ ,  $R^4$  and  $R^5$ , equal to or different from each other, are hydrogen atoms, or linear or branched, saturated or unsaturated  $C_1$ - $C_{20}$ -alkyl,  $C_3$ - $C_{20}$ -cycloalkyl,  $C_6$ - $C_{20}$ -aryl,  $C_7$ - $C_{20}$ -alkylaryl, or  $C_7$ - $C_{20}$ -arylalkyl radicals, optionally containing one or more heteroatoms belonging to groups 13-17 of the Periodic Table of the Elements; or two adjacent  $R^1$ ,  $R^2$ ,  $R^3$ ,  
 25  $R^4$  and  $R^5$  form one or more 3-7 membered ring optional containing heteroatoms belonging to groups 13-17 of the periodic table; such as to form with the cyclopentadienyl moiety the following radicals: indenyl; mono-, di-, tri- and tetra-methyl indenyl; 2-methyl indenyl, 3-butyl-indenyl, 2-isopropyl-4-phenyl indenyl, 2-methyl-4-phenyl indenyl, 2-



FE 6101 (US)

- methyl-4,5 benzo indenyl; 3-trimethylsilyl-indenyl; 4,5,6,7-tetrahydroindenyl; fluorenyl; 5,10-dihydroindeno[1,2-b]indol-10-yl; N-methyl- or N-phenyl-5,10-dihydroindeno [1,2-b]indol-10-yl; 5,6-dihydroindeno[2,1-b]indol-6-yl; N-methyl-or N-phenyl-5,6-dihydroindeno[2,1-b]indol-6-yl; azapentalene-4-yl; thiapentalene-4-yl; azapentalene-6-yl; thiapentalene-6-yl; mono-, di- and tri-methyl-azapentalene-4-yl, 2,5-dimethyl-cyclopenta[1,2-b:4,3-b']-dithiophene.

Non limiting examples of compounds belonging to formulas (I) or (II) are the following compounds (when possible in either their meso or racemic isomers, or mixtures thereof):

- dimethylsilanediylbis(indenyl)zirconium dichloride,
- 10 dimethylsilanediylbis(2-methyl-4-phenylindenyl)zirconium dichloride, dimethylsilanediylbis(4-naphthylindenyl)zirconium dichloride, dimethylsilanediylbis(2-methylindenyl)zirconium dichloride, dimethylsilanediylbis(2-methyl-4-isopropylindenyl)zirconium dichloride, dimethylsilanediylbis(2,4-dimethylindenyl)zirconium dichloride,
- 15 dimethylsilanediylbis(2-methyl-4,5-benzoindenyl)zirconium dichloride, dimethylsilanediylbis(2,4,7-trimethylindenyl)zirconium dichloride, dimethylsilanediylbis(2,4,6-trimethylindenyl)zirconium dichloride, dimethylsilanediylbis(2,5,6-trimethylindenyl)zirconium dichloride, dimethylsilanediylbis (2-isopropyl-4-(4'-tert-butyl)-phenyl-Indenyl)(2,7-Methyl-4-(4'-tert-
- 20 butyl)-Phenyl-Indenyl)-zirconium dichloride, dimethylsilanediylbis (2-isopropyl-4-(4'-tert-butyl)-phenyl-Indenyl)(2-Methyl-4-(4'-tert-butyl)-Phenyl-Indenyl)-zirconium dichloride, dimethylsilanediylbis (2-isopropyl-4-phenyl-Indenyl)(2-Methyl-4-Phenyl-Indenyl)-zirconium dichloride,
- 25 methyl(phenyl)silanediylbis(2-methyl-4,6-diisopropylindenyl)-zirconium dichloride, methyl(phenyl)silanediylbis(2-methyl-4-isopropylindenyl)-zirconium dichloride, 1,2-ethylenebis(indenyl)zirconium dichloride, 1,2-ethylenebis(4,7-dimethylindenyl)zirconium dichloride, 1,2-ethylenebis(2-methyl-4-phenylindenyl)zirconium dichloride,
- 30 1,2-ethylenebis(2-methyl-4,6-diisopropylindenyl)zirconium dichloride, 1,2-ethylenebis (2-methyl-4,5-benzoindenyl)zirconium dichloride,

FE 6101 (US)


- dimethylsilandiyl-1-(2-methyl-indenyl)-7-(2,5-dimethylcyclopentadienyl-[1,2-b:4,3-b']dithiophene)hafnium dichloride;  
 dimethylsilandiyl(3-tert-butyl-cyclopentadienyl)(9-fluorenyl)zirconium dichloride,  
 dimethylsilandiylbis-6-(3-methylcyclopentadienyl-[1,2-b]-thiophene) dichloride;  
 dimethylsilandiylbis-6-(4-methylcyclopentadienyl-[1,2-b]-thiophene)zirconium  
 dichloride;  
 5 dimethylsilandiylbis-6-(4-isopropylcyclopentadienyl-[1,2-b]-thiophene)zirconium  
 dichloride;  
 dimethylsilandiylbis-6-(4-ter-butylcyclopentadienyl-[1,2-b]-thiophene)zirconium  
 dichloride;  
 dimethylsilandiylbis-6-(3-isopropylcyclopentadienyl-[1,2-b]-thiophene)zirconium  
 10 dichloride;  
 dimethylsilandiylbis-6-(3-phenylcyclopentadienyl-[1,2-b]-thiophene)zirconium  
 dichloride;  
 dimethylsilandiylbis-6-(2,5-dichloride-3-phenylcyclopentadienyl-[1,2-b]-  
 thiophene)zirconium di methyl;  
 15 dimethylsilandiylbis-6-[2,5-dichloride-3-(2-methylphenyl)cyclopentadienyl-[1,2-b]-  
 thiophene]zirconium dichloride;  
 dimethylsilandiylbis-6-[2,5-dichloride-3-(2,4,6-trimethylphenyl)cyclopentadienyl-[1,2-b]-  
 thiophene]zirconium dichloride;  
 dimethylsilandiylbis-6-[2,5-dichloride-3-mesitylenecyclopentadienyl-[1,2-b]-  
 20 thiophene]zirconium dichloride;  
 dimethylsilandiylbis-6-(2,4,5-trimethyl-3-phenylcyclopentadienyl-[1,2-b]-  
 thiophene)zirconium dichloride;  
 dimethylsilandiylbis-6-(2,5-diethyl-3-phenylcyclopentadienyl-[1,2-b]-  
 thiophene)zirconium dichloride;  
 25 dimethylsilandiylbis-6-(2,5-diisopropyl-3-phenylcyclopentadienyl-[1,2-b]-  
 thiophene)zirconium dichloride;  
 dimethylsilandiylbis-6-(2,5-diter-butyl-3-phenylcyclopentadienyl-[1,2-b]-  
 thiophene)zirconium dichloride;

FE 6101 (US)

- dimethylsilandiylbis-6-(2,5-ditrimethylsilyl-3-phenylcyclopentadienyl-[1,2-b]-thiophene)zirconium dichloride;  
 dimethylsilandiylbis-6-(3-methylcyclopentadienyl-[1,2-b]-silole)zirconium dichloride;  
 dimethylsilandiylbis-6-(3-isopropylcyclopentadienyl-[1,2-b]-silole)zirconium dichloride;  
 5 dimethylsilandiylbis-6-(3-phenylcyclopentadienyl-[1,2-b]-silole)zirconium dichloride;  
 dimethylsilandiylbis-6-(2,5-dichloride-3-phenylcyclopentadienyl-[1,2-b]-silole)zirconium dichloride;  
 dimethylsilandiylbis-6-[2,5-dichloride-3-(2-methylphenyl)cyclopentadienyl-[1,2-b]-silole]zirconium dichloride;  
 10 dimethylsilandiylbis-6-[2,5-dichloride-3-(2,4,6-trimethylphenyl)cyclopentadienyl-[1,2-b]-silole]zirconium dichloride;  
 dimethylsilandiylbis-6-[2,5-dichloride-3-mesitylenecyclopentadienyl-[1,2-b]-silole]zirconium dichloride;  
 dimethylsilandiylbis-6-(2,4,5-trimethyl-3-phenylcyclopentadienyl-[1,2-b]-silole)zirconium dichloride;  
 15 as well as the corresponding dimethyl, hydrochloro and dihydro and  $\eta^4$ butadiene compounds.

Suitable metallocene complexes belonging to formulas (I), or (II) are described in WO 98/22486, WO 99/58539 WO 99/24446, USP 5,556,928, WO 96/22995, EP-485822, EP-485820, USP 5,324,800, EP-A-0 129 368, USP 5,145,819, EP-A-0 485 823, WO 01/47939, WO 01/44318 and PCT/EP02/13552.

Preferred metallocene compounds have formula (III):

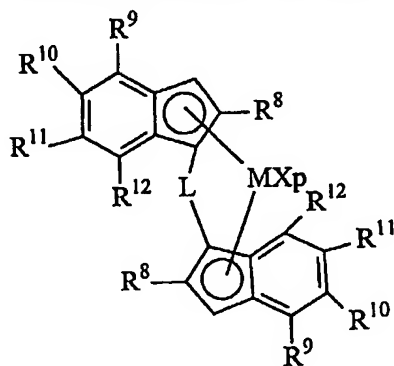

(III)

FE 6101 (US)

wherein M, X, L and p have been described above;

$R^8$ , equal to or different from each other, are linear or branched, saturated or unsaturated  $C_1$ - $C_{20}$ -alkyl,  $C_3$ - $C_{20}$ -cycloalkyl,  $C_6$ - $C_{20}$ -aryl,  $C_7$ - $C_{20}$ -alkylaryl, or  $C_7$ - $C_{20}$ -arylalkyl radicals, optionally containing one or more heteroatoms belonging to groups 13-17 of the Periodic

- 5 Table of the Elements; preferably  $R^8$ , equal to or different from each other, is a methyl, ethyl or isopropyl radical;

$R^9$ ,  $R^{10}$ ,  $R^{11}$  and  $R^{12}$ , equal to or different from each other, are hydrogen atoms, linear or branched, saturated or unsaturated  $C_1$ - $C_{20}$ -alkyl,  $C_3$ - $C_{20}$ -cycloalkyl,  $C_6$ - $C_{20}$ -aryl,  $C_7$ - $C_{20}$ -alkylaryl, or  $C_7$ - $C_{20}$ -arylalkyl radicals, optionally containing one or more heteroatoms

- 10 belonging to groups 13-17 of the Periodic Table of the Elements; or they can join to form a condensed 4-7 membered ring such as a benzene ring to form with the indenyl radical a benzoindenyl moiety;

Preferably  $R^{10}$  is hydrogen; preferably  $R^9$  is a  $C_1$ - $C_{20}$ -alkyl, a  $C_6$ - $C_{20}$ -aryl or a  $C_7$ - $C_{20}$ -arylalkyl radical; more preferably  $R^9$  is a  $C_6$ - $C_{20}$ -aryl or a  $C_7$ - $C_{20}$ -arylalkyl radical.

- 15 Preferably  $R^{10}$  and  $R^{11}$  are hydrogen,  $C_1$ - $C_{20}$ -alkyl, a  $C_6$ - $C_{20}$ -aryl or a  $C_7$ - $C_{20}$ -arylalkyl radical; more preferably  $R^{11}$  is hydrogen or a methyl radical.


Alumoxanes used as component b) can be obtained by reacting water with an organo-aluminium compound of formula  $H_jAlU_{3-j}$  or  $H_jAl_2U_{6-j}$ , where the U substituents, same or different, are hydrogen atoms, halogen atoms,  $C_1$ - $C_{20}$ -alkyl,  $C_3$ - $C_{20}$ -cycloalkyl,  $C_6$ - $C_{20}$ -aryl,

- 20  $C_7$ - $C_{20}$ -alkylaryl or  $C_7$ - $C_{20}$ -arylalkyl radicals, optionally containing silicon or germanium atoms, with the proviso that at least one U is different from halogen, and j ranges from 0 to 1, being also a non-integer number. In this reaction the molar ratio of Al/water is preferably comprised between 1:1 and 100:1.

The molar ratio between aluminium and the metal of the metallocene is generally

- 25 comprised between about 10:1 and about 30000:1, preferably between about 100:1 and about 5000:1.


The alumoxanes used in the catalyst according to the invention are considered to be linear, branched or cyclic compounds containing at least one group of the type:




- 30 wherein the substituents U, same or different, are defined above.

FE 6101 (US)

In particular, alumoxanes of the formula:



can be used in the case of linear compounds, wherein  $n^1$  is 0 or an integer of from 1 to 40 and the substituents U are defined as above; or alumoxanes of the formula:



can be used in the case of cyclic compounds, wherein  $n^2$  is an integer from 2 to 40 and the U substituents are defined as above.

5 Examples of alumoxanes suitable for use according to the present invention are methylalumoxane (MAO), tetra-(isobutyl)alumoxane (TIBAO), tetra-(2,4,4-trimethyl-pentyl)alumoxane (TIOAO), tetra-(2,3-dimethylbutyl)alumoxane (TDMBAO) and tetra-(2,3,3-trimethylbutyl)alumoxane (TTMBAO).

10 Particularly interesting cocatalysts are those described in WO 99/21899 and in WO01/21674 in which the alkyl and aryl groups have specific branched patterns.

Non-limiting examples of aluminium compounds that can be reacted with water to give suitable alumoxanes (b), described in WO 99/21899 and WO01/21674, are:

15 tris(2,3,3-trimethyl-butyl)aluminium, tris(2,3-dimethyl-hexyl)aluminium, tris(2,3-dimethyl-butyl)aluminium, tris(2,3-dimethyl-pentyl)aluminium, tris(2,3-dimethyl-heptyl)aluminium, tris(2-methyl-3-ethyl-pentyl)aluminium, tris(2-methyl-3-ethyl-hexyl)aluminium, tris(2-methyl-3-ethyl-heptyl)aluminium, tris(2-methyl-3-propyl-hexyl)aluminium, tris(2-ethyl-3-methyl-butyl)aluminium, tris(2-ethyl-3-methyl-pentyl)aluminium, tris(2,3-diethyl-pentyl)aluminium, tris(2-propyl-3-methyl-butyl)aluminium, tris(2-isopropyl-

20 3-methyl-butyl)aluminium, tris(2-isobutyl-3-methyl-pentyl)aluminium, tris(2,3,3-trimethyl-pentyl)aluminium, tris(2,3,3-trimethyl-hexyl)aluminium, tris(2-ethyl-3,3-dimethyl-butyl)aluminium, tris(2-ethyl-3,3-dimethyl-pentyl)aluminium, tris(2-isopropyl-3,3-dimethyl-butyl)aluminium, tris(2-trimethylsilyl-propyl)aluminium, tris(2-methyl-3-phenyl-butyl)aluminium, tris(2-ethyl-3-phenyl-butyl)aluminium, tris(2,3-dimethyl-3-phenyl-

25 butyl)aluminium, tris(2-phenyl-propyl)aluminium, tris[2-(4-fluoro-phenyl)-propyl]aluminium, tris[2-(4-chloro-phenyl)-propyl]aluminium, tris[2-(3-isopropyl-phenyl)-

FE 6101 (US)

propyl]aluminium, tris(2-phenyl-butyl)aluminium, tris(3-methyl-2-phenyl-butyl)aluminium, tris(2-phenyl-pentyl)aluminium, tris[2-(pentafluorophenyl)-propyl]aluminium, tris[2,2-diphenyl-ethyl]aluminium and tris[2-phenyl-2-methyl-propyl]aluminium, as well as the corresponding compounds wherein one of the hydrocarbyl groups is replaced with a hydrogen atom, and those wherein one or two of the hydrocarbyl groups are replaced with an isobutyl group.

Amongst the above aluminium compounds, trimethylaluminium (TMA), triisobutylaluminium (TIBA), tris(2,4,4-trimethyl-pentyl)aluminium (TIOA), tris(2,3-dimethylbutyl)aluminium (TDMBA) and tris(2,3,3-trimethylbutyl)aluminium (TTMBA) are preferred.

Non-limiting examples of compounds able to form an alkylmetallocene cation are compounds of formula  $D^+E^-$ , wherein  $D^+$  is a Brønsted acid, able to donate a proton and to react irreversibly with a substituent X of the metallocene of formula (I) and  $E^-$  is a compatible anion, which is able to stabilize the active catalytic species originating from the reaction of the two compounds, and which is sufficiently labile to be removed by an olefinic monomer. Preferably, the anion  $E^-$  comprises one or more boron atoms. More preferably, the anion  $E^-$  is an anion of the formula  $BAr_4^{(-)}$ , wherein the substituents Ar which can be identical or different are aryl radicals such as phenyl, pentafluorophenyl or bis(trifluoromethyl)phenyl. Tetrakis-pentafluorophenyl borate is particularly preferred compound, as described in WO 91/02012. Moreover, compounds of formula  $BAr_3$  can be conveniently used. Compounds of this type are described, for example, in the International patent application WO 92/00333. Other examples of compounds able to form an alkylmetallocene cation are compounds of formula  $BAr_3P$  wherein P is a substituted or unsubstituted pyrrol radical. These compounds are described in WO01/62764. Compounds containing boron atoms can be conveniently supported according to the description of DE-A-19962814 and DE-A-19962910. All these compounds containing boron atoms can be used in a molar ratio between boron and the metal of the metallocene comprised between about 1:1 and about 10:1; preferably 1:1 and 2:1; more preferably about 1:1.

Non limiting examples of compounds of formula  $D^+E^-$  are:

Triethylammoniumtetra(phenyl)borate,  
Tributylammoniumtetra(phenyl)borate,

FE 6101 (US)

- Trimethylammoniumtetra(tolyl)borate,  
 Tributylammoniumtetra(tolyl)borate,  
 Tributylammoniumtetra(pentafluorophenyl)borate,  
 Tributylammoniumtetra(pentafluorophenyl)aluminate,  
 5 Tripropylammoniumtetra(dimethylphenyl)borate,  
 Tributylammoniumtetra(trifluoromethylphenyl)borate,  
 Tributylammoniumtetra(4-fluorophenyl)borate,  
 N,N-Dimethylbenzylammonium-tetrakis(pentafluorophenyl)borate,  
 N,N-Dimethylhexylammonium-tetrakis(pentafluorophenyl)borate,  
 10 N,N-Dimethylaniliniumtetra(phenyl)borate,  
 N,N-Diethylaniliniumtetra(phenyl)borate,  
 N,N-Dimethylaniliniumtetrakis(pentafluorophenyl)borate,  
 N,N-Dimethylaniliniumtetrakis(pentafluorophenyl)aluminate,  
 N,N-Dimethylbenzylammonium-tetrakis(pentafluorophenyl)borate,  
 15 N,N-Dimethylhexylammonium-tetrakis(pentafluorophenyl)borate,  
 Di(propyl)ammoniumtetrakis(pentafluorophenyl)borate,  
 Di(cyclohexyl)ammoniumtetrakis(pentafluorophenyl)borate,  
 Triphenylphosphoniumtetrakis(phenyl)borate,  
 Triethylphosphoniumtetrakis(phenyl)borate,  
 20 Diphenylphosphoniumtetrakis(phenyl)borate,  
 Tri(methylphenyl)phosphoniumtetrakis(phenyl)borate,  
 Tri(dimethylphenyl)phosphoniumtetrakis(phenyl)borate,  
 Triphenylcarbeniumtetrakis(pentafluorophenyl)borate,  
 Triphenylcarbeniumtetrakis(pentafluorophenyl)aluminate,  
 25 Triphenylcarbeniumtetrakis(phenyl)aluminate,  
 Ferroceniumtetrakis(pentafluorophenyl)borate,  
 Ferroceniumtetrakis(pentafluorophenyl)aluminate.  
 Triphenylcarbeniumtetrakis(pentafluorophenyl)borate, and  
 N,N-Dimethylaniliniumtetrakis(pentafluorophenyl)borate.  
 Organic aluminum compounds used as compound c) are those of formula  $H_jAlU_{3-j}$  or  
 $H_jAl_2U_{6-j}$  as described above.

FB 6101 (US)

The porous propylene polymer optionally containing up to 10% by mol; preferably up to 5% by mol of derived units of one or more alpha-olefins of formula  $\text{CH}_2=\text{CHZ}$  wherein Z is H or a  $\text{C}_2\text{-C}_{10}$  alkyl radical obtained with the process of the present invention, preferably has a melting point  $>100^\circ\text{C}$ , more preferably  $>120^\circ\text{C}$ .

- 5 Thus a further object of the present invention is propylene polymer particles optionally containing up to 10% by mol of derived units of one or more alpha-olefins of formula  $\text{CH}_2=\text{CHZ}$  wherein Z is H or a  $\text{C}_2\text{-C}_{10}$  alkyl radical having the following features:
- melting point  $>100^\circ\text{C}$ ; preferably a melting point  $>120^\circ\text{C}$ ;
  - total porosity expressed as percentage of voids,  $\%V/V_1 > 15$ ; preferably  $\%V/V_1 > 20$ ;
  - 10 more preferably  $\%V/V_1 > 30$ ; and
  - molecular weight distribution  $M_w/M_n < 4$ ; preferably  $M_w/M_n < 3$ .

Examples of said alpha olefins that can be used in the process of the present invention are ethylene, 1-butene, 1-pentene, 4-methyl-1-pentene, 1-hexene, 1-octene, 4,6-dimethyl-1-heptene, 1-decene, 1-dodecene, 1-tetradecene, 1-hexadecene, 1-octadecene and 15 1-eicosene. Preferred comonomers are ethylene and 1-butene.

The molecular weight distribution can be varied by using mixtures of different metallocene compounds or by carrying out the polymerization in several stages which differ as to the polymerization temperature and/or the concentrations of the molecular weight regulators and/or the monomers concentration.

20 The molecular weight (I.V) of the obtained polymer preferably ranges from 0.5 to 20.

The following examples are given to illustrate and not to limit the invention.

#### Experimental section.

*rac*-dimethylsilylbis(2-methyl-4-(*para*-tert-butylphenyl)-indenyl)-zirconium dichloride (*rac*- $\text{Me}_2\text{Si}(2\text{-Me-}4(4\text{tBuPh})\text{Ind})_2\text{ZrCl}_2$ ) was prepared according to WO 98/40331 (example 65).

25 Intrinsic viscosity (I.V.) was measured in decahydronaftalene (DHN) at  $135^\circ\text{C}$ .

Porosity (mercury) is determined by immersing a known quantity of the sample in a known quantity of mercury inside a dilatometer and gradually hydraulically increasing the pressure of the mercury. The pressure of introduction of the mercury in the pores is in function of the diameter of the same. The measurement was carried out using a 30 porosimeter "Porosimeter 2000 Series" (Carlo Erba). The total porosity was calculated from the volume decrease of the mercury and the values of the pressure applied.



FE 6101 (US)

The porosity expressed as percentage of voids ( $\%V/V_1$ ) is determined by absorption of mercury under pressure. The volume of mercury absorbed corresponds to the volume of the pores. For this determination, a calibrated dilatometer (diameter 3 mm) CD3 (Carlo Erba) connected to a reservoir of mercury and to a high-vacuum pump ( $1 \times 10^{-2}$  mbar) is used. A weighed amount of sample (about 0,5 g) is placed in the dilatometer. The apparatus is then placed under high vacuum ( $<0,1$  mm Hg) and is maintained in these conditions for 10 minutes. The dilatometer is then connected to the mercury reservoir and the mercury is allowed to flow slowly into it until it reaches the level marked on the dilatometer at a height of 10 cm. The valve that connects the dilatometer to the vacuum pump is closed and the apparatus is pressurized with nitrogen ( $2,5 \text{ Kg/cm}^2$ ). Under the effect of the pressure, the mercury penetrates into the pores and the level goes down according to the porosity of the material. Once the level at which the mercury has stabilized has been measured on the dilatometer, the volume of the pores is calculated from the equation  $V = R^2 \pi \Delta H$ , where R is the radius of the dilatometer and  $\Delta H$  is the difference in cm between the initial and the final levels of the mercury in the dilatometer. By weighting the dilatometer, dilatometer+mercury, dilatometer+mercury+sample, the value of the apparent volume  $V_1$  of the sample prior to penetration of the pores can be calculated. The volume of the sample is given by:

$$V_1 = [P_1 - (P_2 - P)]/D$$

P is the weight of the sample in grams,  $P_1$  is the weight of the dilatometer+mercury in grams,  $P_2$  is the weight of the dilatometer+mercury+sample in grams, D is the density of mercury (at  $25^\circ\text{C} = 13,546 \text{ g/cc}$ ). The percentage porosity is given by the relation:  $X = (100V)/V_1$ .

The pore distribution curve, and the average pore size are directly calculated from the integral pore distribution curve which is function of the volume reduction of the mercury and applied pressure values (all these data are provided and elaborated by the porosimeter associated computer which is equipped with a "MILESTONE 200/2.04" program by C. Erba.

Bulk density (PBD) was measured according to DIN-53194.

**Porous polymeric support**

FE 6101 (US)

Polyethylene prepolymer (support A) was produced according to the procedure described in example 1 of WO 95/26369, under the following conditions: polymerisation temperature 0°C,  $\text{Al}(\text{iBu})_3$  ( $\text{Al}(\text{iBu})_3/\text{ZN}$  catalyst = 1 (w/w)), 1.5 bar-g of ethylene (conversion of 40  $\text{g}_{\text{PE}}/\text{g}_{\text{cat}}$ ). Characterization data of the polymer are reported in table 1

- 5 Polypropylene prepolymer (support B) was produced according to the procedure described in the example 1 of WO 00/08065, under the following conditions: polymerisation temperature 20°C,  $\text{Al}(\text{iBu})_3$  ( $\text{Al}(\text{iBu})_3/\text{ZN}$  catalyst = 1 (w/w)), propylene flow = 1 kg/h for 2h, then 5 kg/h for 6h (conversion 40  $\text{g}_{\text{PP}}/\text{g}_{\text{cat}}$ ). Characterization data of the polymer are reported in table 1

10 Table 1

support	PBD	% of pores having diameter comprised between 0.1 $\mu\text{m}$ (1000 Å) and 2 $\mu\text{m}$ (20000 Å)	Porosity cc/g
A	0.286	70.57	0.566
B	0.262	64.51	0.663

### Preparation of the supported catalyst systems

#### Catalyst system 1

- 1700g of support A were treated with  $\text{H}_2\text{O}$  dispersed in hexane in order to deactivate the  $\text{MgCl}_2/\text{Ti}$ -based catalyst, then dried in a flow of nitrogen. The support is  
 15 contacted with 600mL of a MAO (methyl alumoxane) solution (Albemarle 100g/L in toluene) to scavenge impurities and residual water.

- 19.7g of  $\text{rac-Me}_2\text{Si}(2\text{-Me-4(}i\text{BuPh)Ind})_2\text{ZrCl}_2$  are added in 1.8 L of MAO solution (30% w/w in toluene). The catalytic mixture obtained, was diluted with 1 L of purified toluene in order to reach the volume necessary for a homogeneous impregnation.  
 20 The so obtained catalytic mixture is impregnated on support A (treated as described above) according to the procedure described in WO 01/44319.

The obtained supported catalyst system contains 9.2%w of Aluminium and 0.08%w of Zirconium.

#### Catalyst system 2

- 25 1870g of support A described above, were treated with  $\text{H}_2\text{O}$  dispersed in hexane in order to deactivate the  $\text{MgCl}_2/\text{Ti}$ -based catalyst, then dried in a flow of nitrogen. The

FE 6101 (US)

support is contacted with 200mL of a MAO solution (30%w in toluene) to scavenge impurities and residual water.

28.6g of  $\text{rac-Me}_2\text{Si}(2\text{-Me-4(4tBuPh)Ind})_2\text{ZrCl}_2$  were added in 1.65 L of MAO solution (30% w/w in toluene). The catalytic mixture obtained, was diluted with 650 mL of purified toluene in order to reach the volume necessary for a homogeneous impregnation. The so obtained catalytic mixture is impregnated on support A, (treated as described above) according to the procedure described in WO 01/44319.

The obtained supported catalyst system contains 8%w of Aluminium and 0.11%w of Zirconium.

#### 10 Catalyst system 3

5.5g of support A described above, were treated with  $\text{H}_2\text{O}$  dispersed in hexane in order to deactivate the  $\text{MgCl}_2/\text{Ti}$ -based catalyst, then dried in a flow of nitrogen. The support is contacted with 0.5mL of a MAO solution (30%w in toluene) diluted with 1.5 ml of toluene to scavenge impurities and residual water.

15 The catalytic complex was prepared by adding 32mg of metallocene  $\text{rac-Me}_2\text{Si}(2\text{-Me-4(4tBuPh)Ind})_2\text{ZrCl}_2$  in 5mL of MAO solution (30% w/w in toluene).

The so obtained catalytic mixture is impregnated on support A (treated as described above) according to the procedure described in WO 01/44319.

The obtained supported catalyst system contains 9.2%w of Aluminium and 0.041%w of Zirconium.

#### 20 Catalyst system 4

90g of support B described above, were treated with  $\text{H}_2\text{O}$  dispersed in hexane in order to deactivate the  $\text{MgCl}_2/\text{Ti}$ -based catalyst, then dried in a flow of nitrogen. Then it were loaded into the contacting vessel; mechanically stirred, under inert atmosphere and were contacted with 9mL of a MAO solution (30%w in toluene), diluted with 21 mL of toluene, to scavenge impurities and residual water.

0.67g of metallocene  $\text{rac-Me}_2\text{Si}(2\text{-Me-4(4tBuPh)Ind})_2\text{ZrCl}_2$  were added to 81mL of MAO solution (30% w/w in toluene). The so obtained catalytic mixture obtained, was diluted with 60mL of purified toluene and contacted with support B according to the procedure described in WO 01/44319.

FE 6101 (US)

After the supportation an off line ethylene prepolymerization was carried out with ethylene up to a polymerisation extent of 20% wt, in the following conditions: 35°C, 0.55-0.65 bar ethylene partial pressure, polymerization time 60 minutes.

The prepolymerized catalyst contains a 7.1%w of Aluminium and 0.04%w of

5 Zirconium.

**Catalyst system 5 (comparative)**

3 kg of silica (Sylopol 948<sup>TM</sup>) is loaded in a process filter whose filter plate points upward, and suspended in 15 L of toluene. While stirring 7 L of a 30% strength by weight MAO solution are metered in at such a rate that the internal temperature does not  
10 exceed 35°C. After stirring for another 1 hour at a low stirrer speed, the process filter is turned that its filtration plate points downwards, the suspension is filtered, firstly under atmospheric pressure and then using 3 bar of nitrogen pressure. In parallel to the treatment of the support material, 2.0 L of 30% strength by weight MAO solution and 92.3 g of *rac*-dimethylsilylbis(2-methyl-4-(*para*-tert-butylphenyl)-indenyl) -zirconium  
15 dichloride are placed in a reaction vessel, the solution is stirred for 1 hour and allowed to settle for a further 30 minutes. The solution is subsequently added to the pretreated support material with the outlet closed. After addition is complete, the outlet is opened and the filtrate is allowed to drain. When no more runs off, the outlet is closed, the filter cake is stirred for 15 minutes and allowed to rest for 1 hour. A nitrogen pressure of 3 bar  
20 is subsequently applied with the outlet open. 15 L of isododecane are added to the remaining solid, the mixture is stirred for 15 minutes and filtered. The washing step is repeated, and the solid is subsequently pressed dry by means of a nitrogen pressure of 3 bar. For use in the polymerization, the total amount of the catalyst is resuspended in 15 L of isododecane.

25 The catalyst system contains 0.16%w of Zirconium.

**Polymerization examples 1-7 and comparative examples 8-10**

All polymerization tests were carried out in a 2.490 L stainless steel Reactor, operated by a Yokogawa system, and equipped with a paddle stirrer, with stirring rate of 300-400 RPM, a stainless steel vial for catalyst injection, and a look-through glass  
30 window. The reactor is purified by washing with 1L hexane containing 3 mL of trimethylaluminum 10% (1M), stirring 1 h at 70°C, and then discharging the solution

FE 6101 (US)

through the bottom valve under  $N_2$  pressure. The reactor temperature is lowered to  $30^\circ C$ , and the reactor pressure to 0.5 bar-g. Then the scavenger (4 mL 1M TEA in hexane) is added under a stream of propylene, and 700 g of liquid propylene is added. The amount of supported catalyst indicated in table 2 is added to the reactor through a stainless steel vial.

- 5 For catalyst systems 1-5, the dry powder is loaded into the steel vial under  $N_2$  stream, injected into the reactor by  $N_2$  overpressure, then the vial rinsed with 3-4 mL of hexanes into the reactor, again with  $N_2$  overpressure. For catalyst system 6, the powder is added as a slurry in hexanes.

- 10 The homopolymer is produced in liquid monomer, by first a prepolymerization at  $30^\circ C$  for 10 min, then adding the required amount of hydrogen, then the temperature is raised to the polymerizing temperature indicated in table 2 in 10 minutes. The polymerization is carried out for a time indicated in table 2 then it is stopped by adding CO and venting the monomers. The reactor is cooled, purged with  $N_2$ , opened to inspect fouling, and the polymer is collected and dried in a vacuum oven at  $60^\circ C$  for 1 hour. The
- 15 polymerization conditions and the characterization data of the obtained polymers are reported in Table 2.

FE 6101 (US)

table 2

Ex	catalyst system	MAO/Zr	Zr	mg of supp. catalyst	T <sub>p</sub>	t <sub>p</sub>	H <sub>2</sub>	H <sub>2</sub>	H <sub>2</sub>	total porosity
		molar	%wt		°C	min.	mL	%wt liqph	ppm	%V/V <sub>1</sub>
1*	1	398	0.08	115	70	60	0	0	0	10.4
2	1	398	0.08	163	70	35	100	0.00067	6.7	34.9
3	2	246	0.11	105	70	50	100	0.00067	6.7	21.4
4	2	246	0.11	95	70	40	500	0.0034	34	33.4
5	3	756	0.04	153	70	60	100	0.00067	6.7	22.2
6	4	570	0.04	80	70	40	500	0.0034	34	23.1
7	4	570	0.04	84	70	40	2000	0.0134	134	22
8*	5	353	0.16	132	70	60	0	0	0	6.4
9*	5	353	0.16	138	70	60	500	0.0034	34	7.6
10*	5	353	0.16	99	70	60	1000	0.0067	67	7

\* comparative

FE 6101 (US)

table 2 (continued)

Ex	yield	Activity		morphology	PBD	IV <sub>(DHN)</sub>	Mw/Mn	T <sub>m</sub>
	g	kg <sub>PP</sub> / g <sub>cat</sub> /h	kg <sub>PP</sub> / g <sub>Zr</sub> /h		g/cc	dl/g		°C
1	210	1.83	2341	spherical, no fouling, no powder	0.355	n.a.	n.a.	149.7
2	315	3.31	4247	spherical, no fouling, no powder	0.346	4.17	2.8	149
3	290	3.31	3013	spherical, no fouling, no powder	0.330	4.47	2.8	151
4	275	4.34	3947	spherical, no fouling, no powder	0.314	3.55	2.9	150.5
5	275	1.80	4384	spherical, no fouling, no powder	0.332	4.27	2.6	151
6	167	3.13	7455	spherical, no fouling, no powder	0.227	3.35	2.7	n.a.
7	205	3.66	8716	spherical, no fouling, no powder	0.224	0.72	2.3	n.a.
8*	209	1.58	990	spherical small,	0.452	4.32	n.a.	150.5
9*	271	1.96	1227	spherical small, powder	0.382	3.28	n.a.	151
10*	285	2.88	1799	spherical small, powder	0.372	2.43	n.a.	150.7

n.a. not available

\* comparative

FE 6101 (US)

## CLAIMS


1. A process for obtaining porous propylene polymers optionally containing up to 10% by mol of derived units of one or more alpha-olefins of formula  $\text{CH}_2=\text{CHZ}$  wherein Z is H or a  $\text{C}_2\text{-C}_{10}$  alkyl radical, comprising the step of polymerizing propylene and optionally said one or more alpha olefins, under polymerization conditions, in the presence of a catalyst system comprising at least a metallocene compound, said process being characterized in that:
- a) the catalyst system is supported on an organic porous polymer; and
  - b) at least part of the polymerization reaction is carried out in the presence of hydrogen.
2. The process according to claim 1 being further characterized in that the polymerization medium is liquid propylene optionally containing minor amounts of an inert hydrocarbon solvent or of one or more comonomer of formula  $\text{CH}_2=\text{CHZ}$ .
3. A process for obtaining a porous propylene polymer optionally containing up to 10% by mol of derived units of one or more alpha-olefins of formula  $\text{CH}_2=\text{CHZ}$  wherein Z is H or a  $\text{C}_2\text{-C}_{10}$  alkyl radical, comprising the following steps:
- a) prepolymerizing propylene optionally with one or more alpha-olefins of formula  $\text{CH}_2=\text{CHZ}$  wherein Z is H or a  $\text{C}_2\text{-C}_{10}$  alkyl radical in the presence of a catalyst system supported on an organic porous polymer, said catalyst comprising a metallocene compound; wherein the polymerization medium is liquid propylene; and
  - b) contacting propylene and optionally one or more alpha-olefins of formula  $\text{CH}_2=\text{CHZ}$  wherein Z is H or a  $\text{C}_2\text{-C}_{10}$  alkyl radical under polymerization conditions in the presence of hydrogen and the prepolymerized catalyst system obtained in step a).
4. The process according to claim 3 wherein the polymerization medium in step b) is liquid propylene optionally containing minor amounts of an inert hydrocarbon solvent or of one or more comonomer of formula  $\text{CH}_2=\text{CHZ}$ .
5. The process according to anyone of claims 1 to 4 wherein the organic porous polymer has porosity due to pores with diameter up  $10\text{ }\mu\text{m}$  ( $100000\text{ }\text{\AA}$ ) higher than  $0.1\text{ cc/g}$ .



FE 6101 (US)

6. The process according to anyone of claims 1 to 5 wherein in the organic porous polymer the total porosity due to of all pores whose diameter is comprised between 0.1  $\mu\text{m}$  (1000  $\text{\AA}$ ) and 2  $\mu\text{m}$  (20000  $\text{\AA}$ ) is at least 30% of the total porosity due to of all pores whose diameter is comprised between 0.02  $\mu\text{m}$  (200  $\text{\AA}$ ) and 10  $\mu\text{m}$  (100000  $\text{\AA}$ ).
7. The process according to anyone of claims 1 to 6 wherein the amount of hydrogen present during the polymerization reaction is more than 1 ppm.
8. The process according to anyone of claims 1 to 8 wherein the catalyst system containing a metallocene compound is obtainable by reacting:
- a metallocene compound;
  - at least an alumoxane or a compound able to form an alkylmetallocene cation; and
  - optionally an organo aluminum compound.
9. The process according to claim 8 wherein the catalyst system is supported on an organic porous polymeric support according to a process comprising the following steps:
- preparing a catalyst solution comprising a catalyst system;
  - introducing into a contacting vessel:
    - a porous support material in particle form, and
    - a volume of the catalyst solution not greater than the total pore volume of the porous support material introduced;
  - discharging the material resulting from step (b) from the contacting vessel and suspending it in an inert gas flow, under such conditions that the solvent evaporates; and
  - reintroducing at least part of the material resulting from step (c) into the contacting vessel together with another volume of the catalyst solution not greater than the total pore volume of the reintroduced material.
10. The process according to anyone of claims 1 to 9 wherein the metallocene compounds belong to formula (I):

FE 6101 (US)

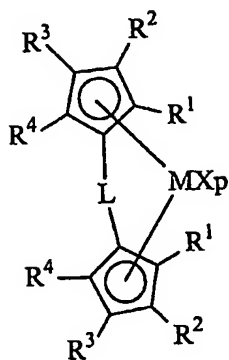

(I)

wherein

M is a transition metal belonging to group 4, 5 or to the lanthanide or actinide groups of the Periodic Table of the Elements;

the substituents X, equal to or different from each other, are monoanionic sigma ligands selected from the group consisting of hydrogen, halogen, R<sup>6</sup>, OR<sup>6</sup>, OCOR<sup>6</sup>, SR<sup>6</sup>, NR<sup>6</sup><sub>2</sub> and PR<sup>6</sup><sub>2</sub>, wherein R<sup>6</sup> is a linear or branched, saturated or unsaturated C<sub>1</sub>-C<sub>20</sub> alkyl, C<sub>3</sub>-C<sub>20</sub> cycloalkyl, C<sub>6</sub>-C<sub>20</sub> aryl, C<sub>7</sub>-C<sub>20</sub> alkylaryl or C<sub>7</sub>-C<sub>20</sub> arylalkyl group, optionally containing one or more Si or Ge atoms;


p is an integer equal to the oxidation state of the metal M minus 2;

L is a divalent bridging group selected from C<sub>1</sub>-C<sub>20</sub> alkylidene, C<sub>3</sub>-C<sub>20</sub> cycloalkylidene, C<sub>6</sub>-C<sub>20</sub> arylidene, C<sub>7</sub>-C<sub>20</sub> alkylarylidene, or C<sub>7</sub>-C<sub>20</sub> arylalkylidene radicals optionally containing heteroatoms belonging to groups 13-17 of the Periodic Table of the Elements, and silylidene radical containing up to 5 silicon atoms;

R<sup>1</sup>, R<sup>2</sup>, R<sup>3</sup>, R<sup>4</sup> and R<sup>5</sup>, equal to or different from each other, are hydrogen atoms, or linear or branched, saturated or unsaturated C<sub>1</sub>-C<sub>20</sub>-alkyl, C<sub>3</sub>-C<sub>20</sub>-cycloalkyl, C<sub>6</sub>-C<sub>20</sub>-aryl, C<sub>7</sub>-C<sub>20</sub>-alkylaryl, or C<sub>7</sub>-C<sub>20</sub>-arylalkyl radicals, optionally containing one or more heteroatoms belonging to groups 13-17 of the Periodic Table of the Elements; or two adjacent R<sup>1</sup>, R<sup>2</sup>, R<sup>3</sup>, R<sup>4</sup> and R<sup>5</sup> form one or more 3-7 membered ring optionally containing heteroatoms belonging to groups 13-17 of the periodic table.

11. The process according to claim 10 wherein the metallocene compounds belong to formula (III):

FE 6101 (US)

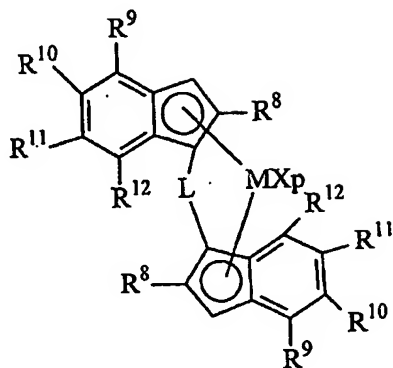

(III)

wherein M, X, L and p have the meaning as in claim 7;

$R^8$ , equal to or different from each other, are linear or branched, saturated or unsaturated  $C_1$ - $C_{20}$ -alkyl,  $C_3$ - $C_{20}$ -cycloalkyl,  $C_6$ - $C_{20}$ -aryl,  $C_7$ - $C_{20}$ -alkylaryl, or  $C_7$ - $C_{20}$ -arylalkyl radicals, optionally containing one or more heteroatoms belonging to groups 13-17 of the Periodic Table of the Elements;

$R^9$ ,  $R^{10}$ ,  $R^{11}$  and  $R^{12}$ , equal to or different from each other, are hydrogen atoms, linear or branched, saturated or unsaturated  $C_1$ - $C_{20}$ -alkyl,  $C_3$ - $C_{20}$ -cycloalkyl,  $C_6$ - $C_{20}$ -aryl,  $C_7$ - $C_{20}$ -alkylaryl, or  $C_7$ - $C_{20}$ -arylalkyl radicals, optionally containing one or more heteroatoms belonging to groups 13-17 of the Periodic Table of the Elements; or they can join to form a condensed 4-7 membered ring.

12. A propylene polymer optionally containing up to 10% by mol of derived units of one or more alpha-olefins of formula  $CH_2=CHZ$  wherein Z is H or a  $C_2$ - $C_{10}$  alkyl radical having the following features:

- melting point  $>100^\circ C$ ;
- total porosity expressed as percentage of voids  $\%V/V_1 >15$ ; and
- molecular weight distribution  $Mw/Mn <4$ .

A process for obtaining porous propylene polymers optionally containing up to 10% by mol of derived units of one or more alpha-olefins of formula  $\text{CH}_2=\text{CHZ}$  wherein Z is H or a  $\text{C}_2\text{-C}_{10}$  alkyl radical, comprising the step of polymerizing propylene and optionally said one or more alpha olefins, under polymerization conditions, in the presence of a catalyst system comprising at least a metallocene compound, said process being characterized in that:

- the catalyst system is supported on an organic porous polymer; and
- at least part of the polymerization reaction is carried out in the presence of hydrogen.

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**